
P-016 P-16 Option A3, his frame (4 Nov)

Designtech Architects · Ar. Mamunur Rashid

Every phase of the design so far · 05 Nov 2026

PHASE 0 · SITE · P-016 P-16 Rajbari Plot, the Real P-14
plot 1298 sft · inside setbacks 958 sft · road side faces N

PLATE1 · 1 step · plain rectangle

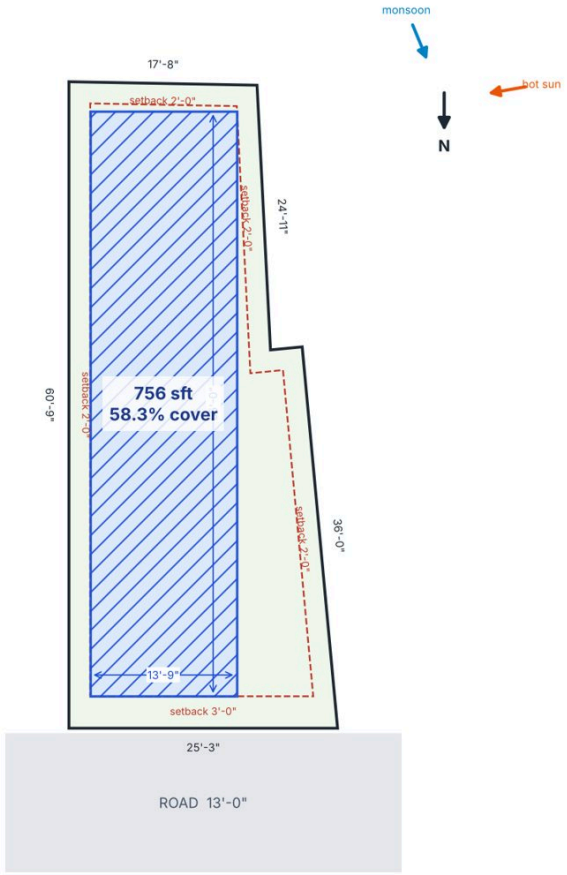

holds per floor: sft

PLATE2 · 2 steps · +131 sft



holds per floor: 1×718 sft


STAGGER · 5 steps · +169 sft ★ CHOSEN



holds per floor: 1×756 sft


PHASE 1 · CORE, UNITS, WALL LINES · P-016 P-16 Option A2, his marks (4 Nov)
dashed grey = wall lines (where columns will land) · dotted blue = outside walls fit for toilet/kitchen shafts · red dot = deepest spot · yellow = stair half-landing window

OPTION 1 ★ RECOMMENDED · score 74.1 · gate PASS

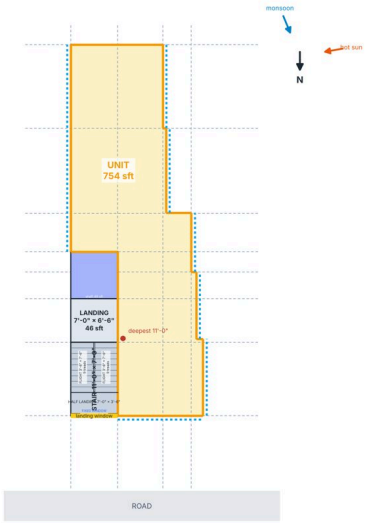


one unit of 754 sft
core 18% of the floor
stair's half landing on the N outside wall (window at the landing)
DNA: Unit takes no plan his way

OPTION 2 · score 69.9 · gate PASS

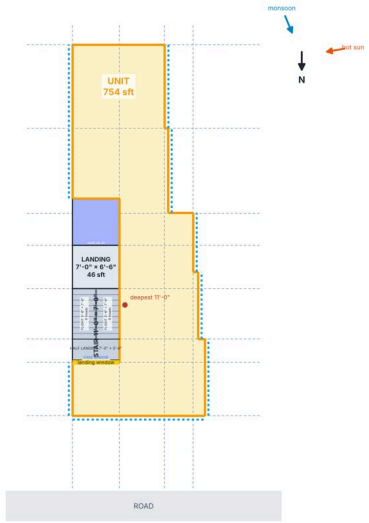


one unit of 754 sft
core 18% of the floor
stair lit from its side only — the half landing is inside
core side-mid — where his very-narrow plans put it (S-021, S-035, P-003) +6
DNA: Unit takes no plan his way

OPTION 3 · score 69.9 · gate PASS

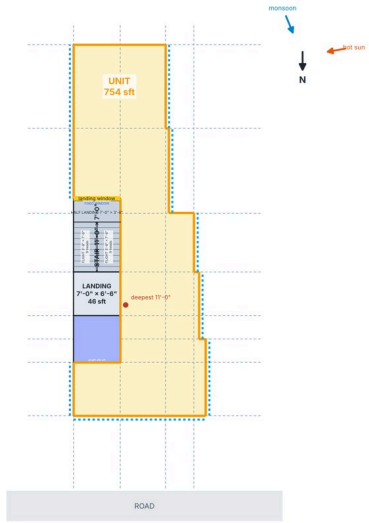


one unit of 754 sft
core 18% of the floor
stair lit from its side only — the half landing is inside
core side-mid — where his very-narrow plans put it (S-021, S-035, P-003) +6
DNA: Unit takes no plan his way

OPTION 4 · score 60.6 · gate PASS

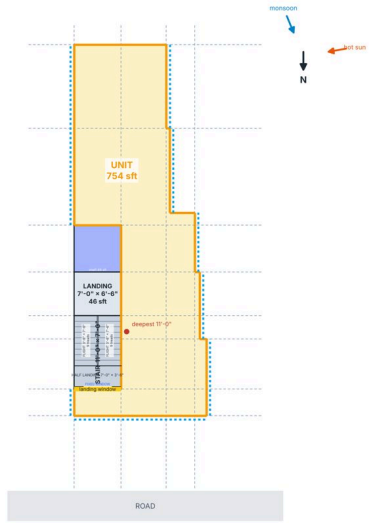


one unit of 754 sft
core 18% of the floor
stair lit from its side only — the half landing is inside
core side-mid — where his very-narrow plans put it (S-021, S-035, P-003) +6
Unit: 28 sft narrower than 7'-6" (hard to use)

OPTION 6 · score 48.5 · gate PASS

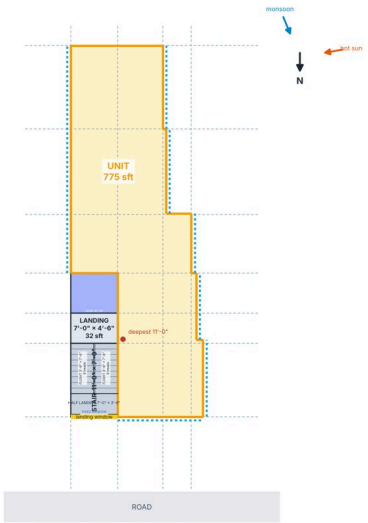


his P-014's bones mirrored (his order 4 Nov 13:49): the core in the front corner on the EAST (P-014: west) — the stair's half landing on the road face with its window, the landing, then the lift; the flat runs in rows behind it: the front bedroom on the WEST now (its face needs the elevation's sun treatment), the drawing-cum-dining beside the core, the wet row, the bedrooms behind; the plate staggered along the angled west boundary room row by room (his TO-04 STAGGER)
Unit: a long unit (2.8 × as long as wide) — rooms can't all open off the living (rule 76)
one unit of 775 sft
core 16% of the floor
stair's half landing on the N outside wall (window at the landing)

OPTION 8 · score 48.5 · gate PASS

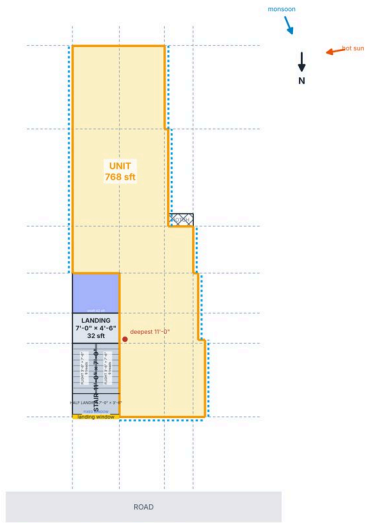

his P-014's bones mirrored (his order 4 Nov 13:49): the core in the front corner on the EAST (P-014: west) — the stair's half landing on the road face with its window, the landing, then the lift; the flat runs in rows behind it: the front bedroom on the WEST now (its face needs the elevation's sun treatment), the drawing-cum-dining beside the core, the wet row, the bedrooms behind; the plate staggered along the angled west boundary room row by room (his TO-04 STAGGER)
Unit: a long unit (2.8 × as long as wide) — rooms can't all open off the living (rule 76)
one unit of 768 sft
core 16% of the floor
stair's half landing on the N outside wall (window at the landing)

OPTION 9 · score 51.7 · gate PASS · CHOSEN

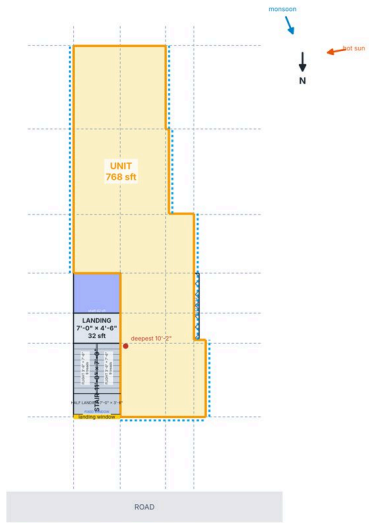


his P-014's bones mirrored (his order 4 Nov 13:49): the core in the front corner on the EAST (P-014: west) — the stair's half landing on the road face with its window, the landing, then the lift; the flat runs in rows behind it: the front bedroom on the WEST now (its face needs the elevation's sun treatment), the drawing-cum-dining beside the core, the wet row, the bedrooms behind; the plate staggered along the angled west boundary room row by room (his TO-04 STAGGER)
set 213 (his marks 4 Nov 15:50 on Option A): the hatched step pocket joined to the living as the fridge bay (no thin walls), the Shelf's strip given to his west balcony
Unit: a long unit (2.8 × as long as wide) — rooms can't all open off the living (rule 76)
one unit of 768 sft
core 16% of the floor




columns for 5 storeys: C1 10"×15" ×3 (corner) · C2 10"×15" ×9 (edge) · C3 10"×15" ×1 (inside) · C4 10"×15" ×4 (lift) — planning sizes from his grids; the engineer's design decides
STRUCTURAL ENGINEER: 17 columns · 54 sft a column (his band 72–186, median 113) · longest beam span 14.6' → beam ~16" deep · slab 5" (largest panel) · 13 beam(s) across a room (rule 109: named) · his 24 beams as drawn (rule 275); for the engineer: 2 eccentric bearing(s) · CIVIL GUARD: C3 ×1 · C5 ×1 · his columns (rule 272), said for the engineer: too many columns: 54 sft a column (his least is 72); 6 column lines on x over 17' — a mean bay of 3.4' (his grids: median 12.0', never under 8.9'); the grid is mostly empty: 17 columns on 6 × 7 lines (0.40 — his grids: median 0.78, least 0.52) — too many lines · ✓ no finding
inside sizes (wall face to wall face) · walls: outside 5" (rule 82 bent to his narrow plans, rule 108), between units / core and partitions 5" · unit sft = gross (walls in), carpet = rooms inside · doors drawn with their swing, sliding doors to balconies · W = window, V = ventilator · ▼ = unit door · blue = duct shafts · red squares = columns, blue dotted bands = beams (red where a beam crosses a room) · F = fridge, WASH = hand-wash basin · red outline = a broken rule · dotted red = sunshade (inside the site line) · pink wave = curtain (open / closed) · dashed brown = site line, green = setback · duct sizes written inside each duct · lift drawn as its walled shaft with the car inside · AC (rule 177): a split AC in every bedroom and living — indoor unit dashed, high on the outside wall; its outdoor unit (ODU) on a cantilevered RCC tray 3'-0" × 1'-6" (4" slab, 6" upstand), hatched; side walls before the road front


PHASE 3 · BASIC MODEL · AXONOMETRIC FROM THE ROAD, RIGHT · P-016 P-16 Option A3, his frame (4 Nov)

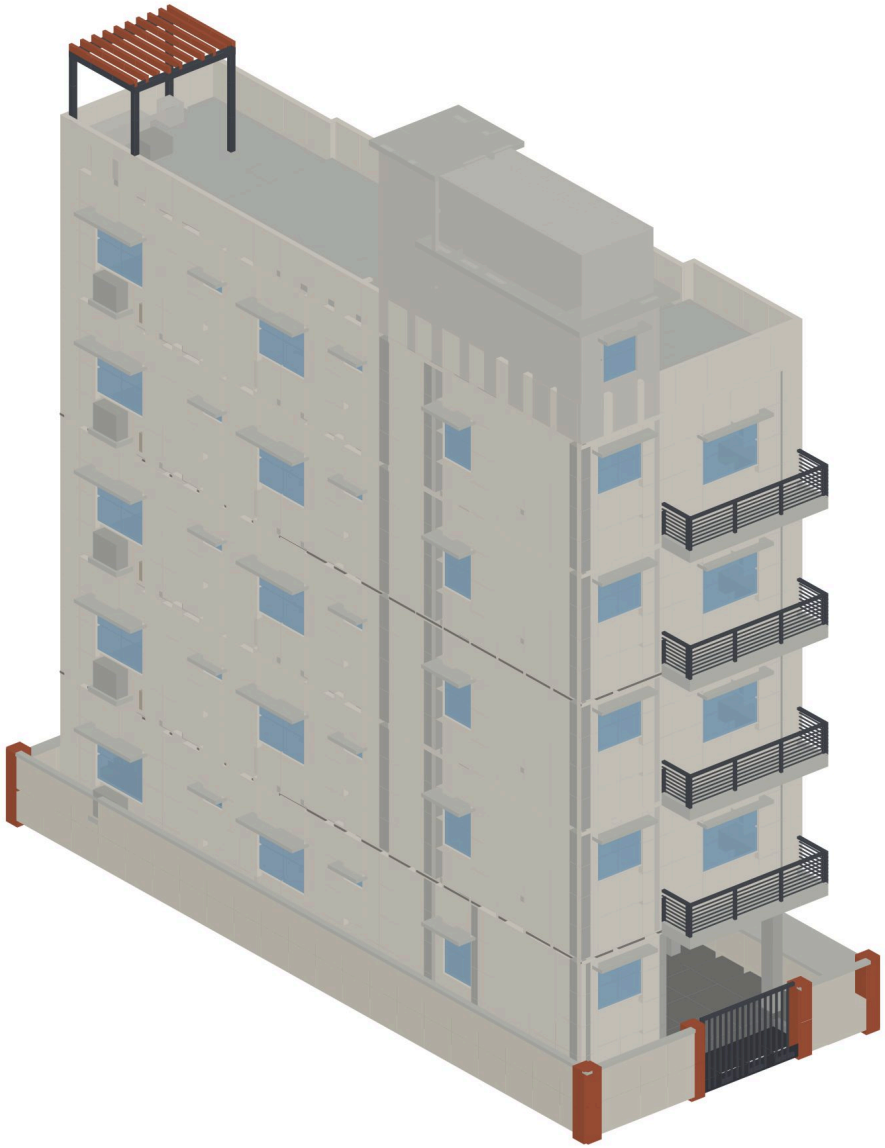


PHASE 3 · BASIC MODEL · AXONOMETRIC FROM THE ROAD, LEFT · P-016 P-16 Option A3, his frame (4 Nov)

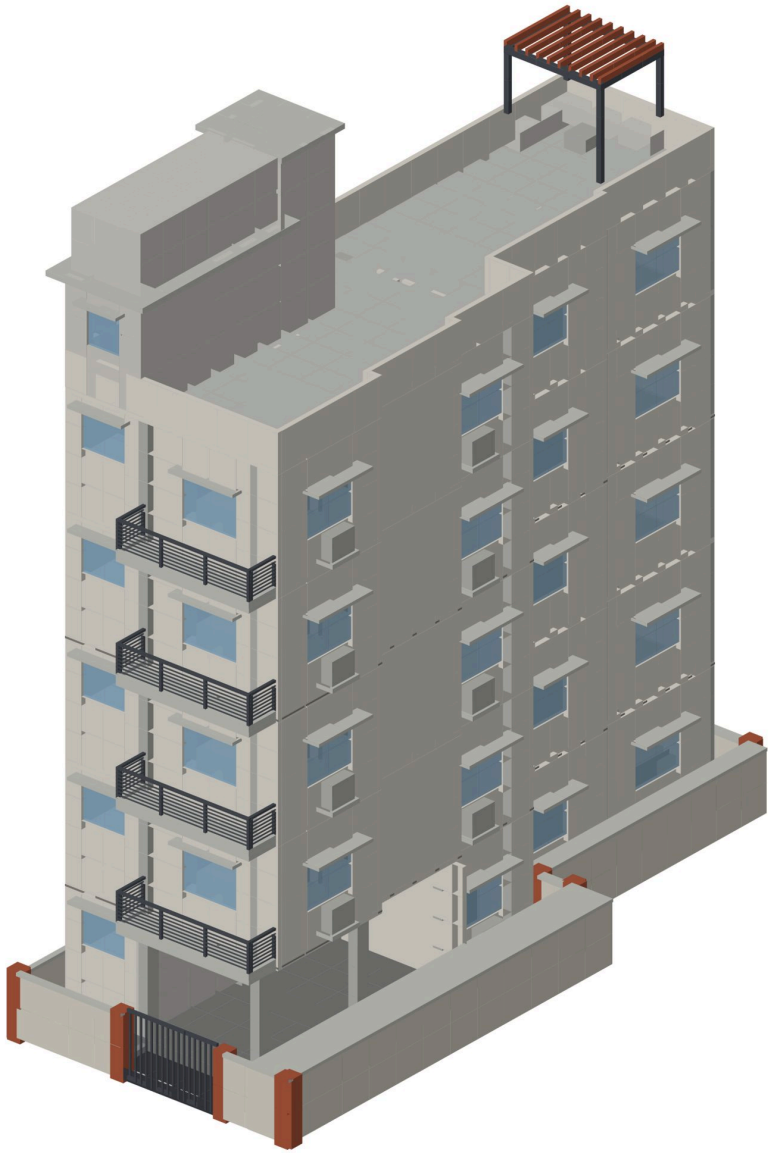


PHASE 3 · BASIC MODEL · RIGHT SIDE ELEVATION · P-016 P-16 Option A3, his frame (4 Nov)

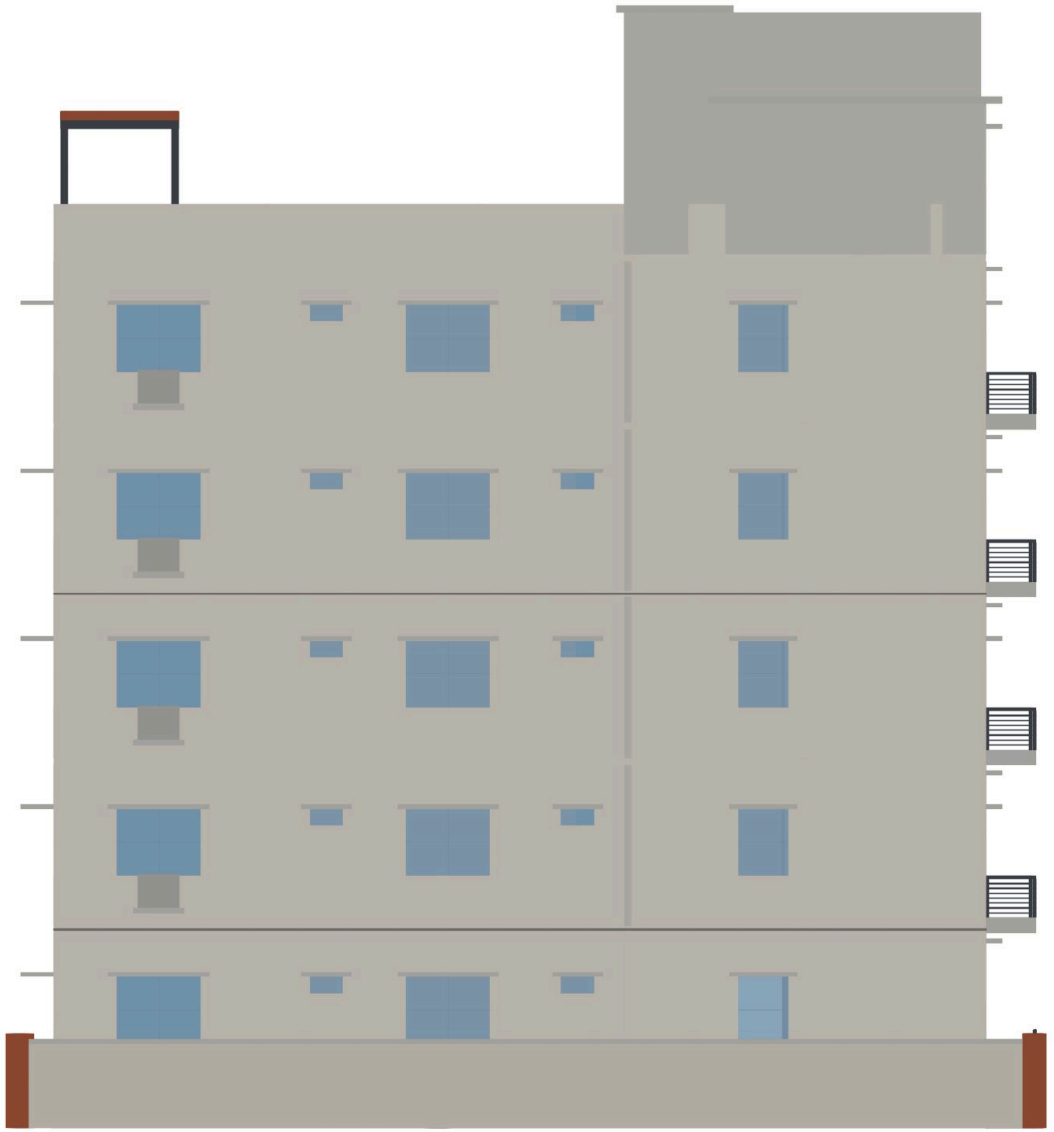


PHASE 3 · BASIC MODEL · REAR ELEVATION · P-016 P-16 Option A3, his frame (4 Nov)

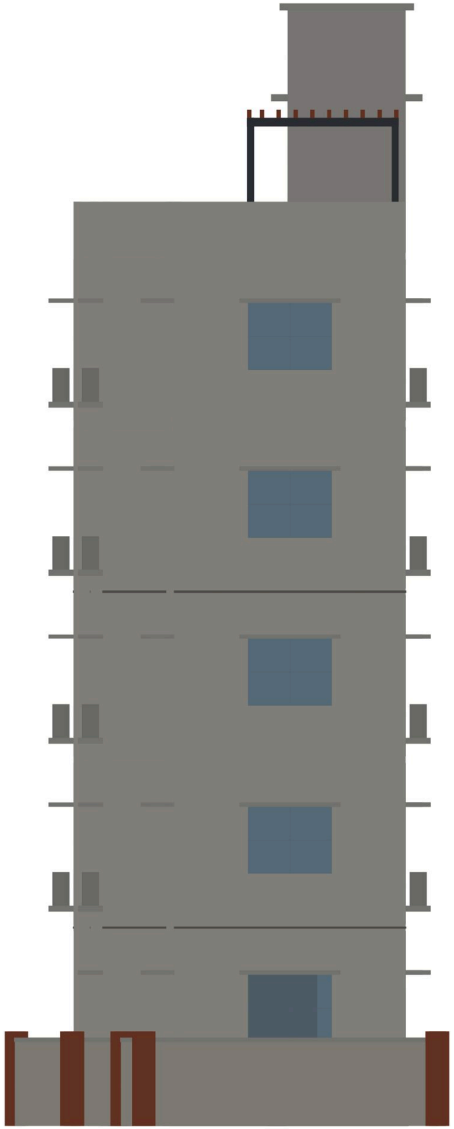


PHASE 3 · BASIC MODEL · FRONT ELEVATION (ROAD) · P-016 P-16 Option A3, his frame (4 Nov)

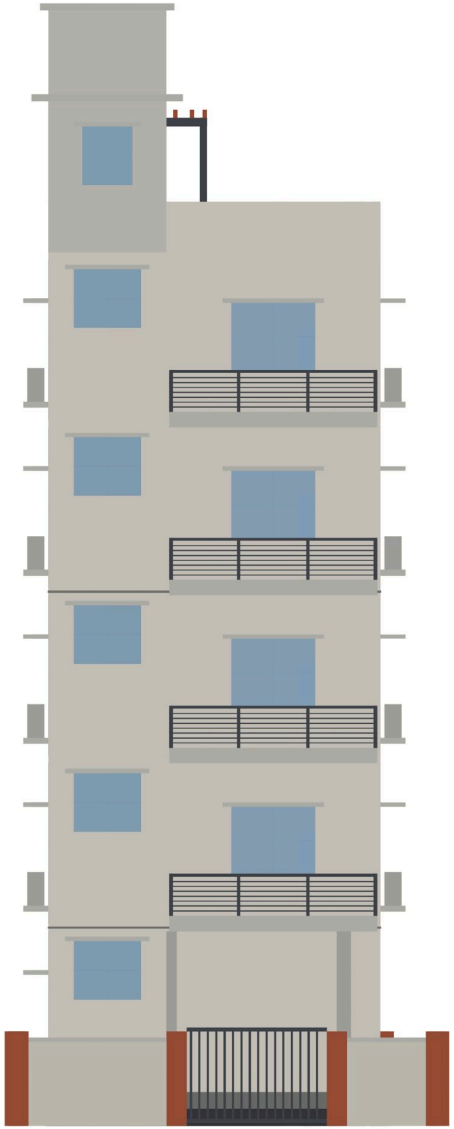

PHASE 3 · BASIC MODEL · LEFT SIDE ELEVATION · P-016 P-16 Option A3, his frame (4 Nov)

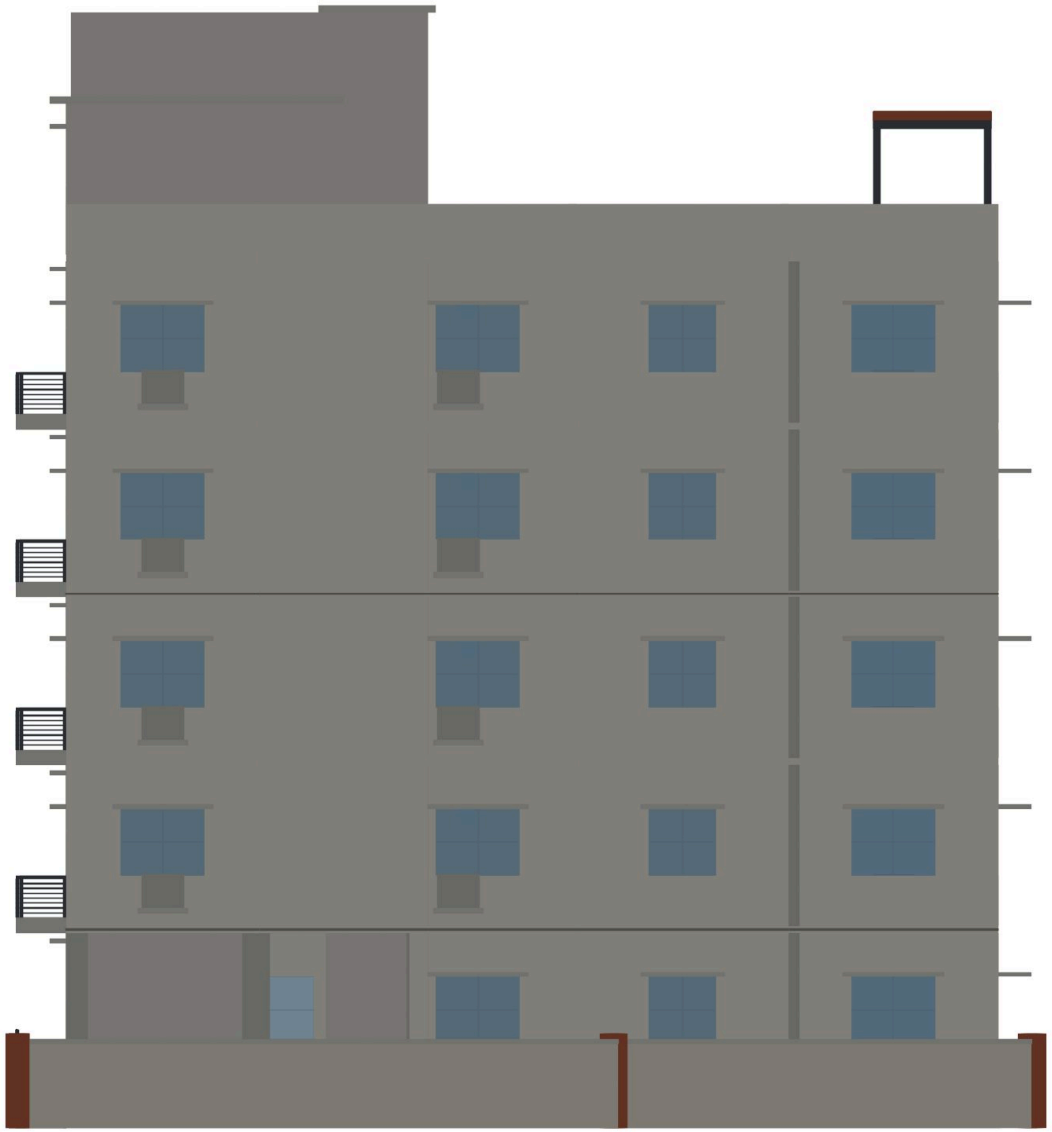

Phase 3 · views · render cutaway 1st floor

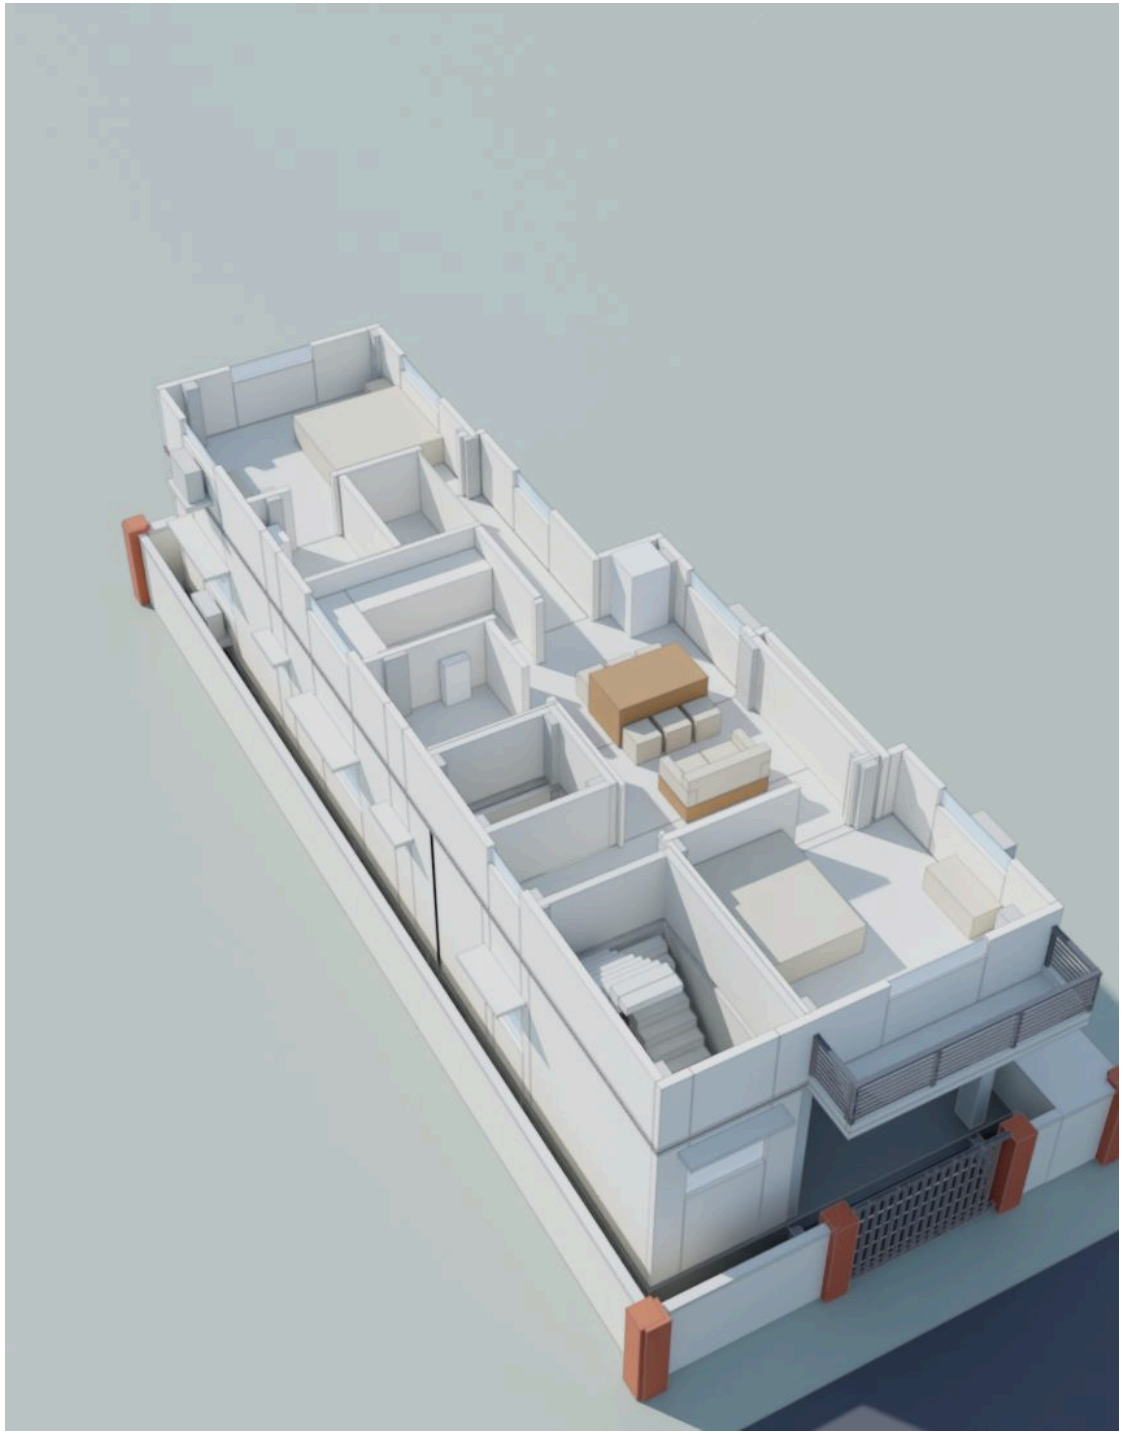

Phase 3 · views · render road left



Phase 3 · views · render road right



Phase 4 · look A (TH-20 Rajbari Blade) · option A aerial




Phase 4 · look A (TH-20 Rajbari Blade) · option A back left



Phase 4 · look A (TH-20 Rajbari Blade) · option A back right



Phase 4 · look A (TH-20 Rajbari Blade) · option A front

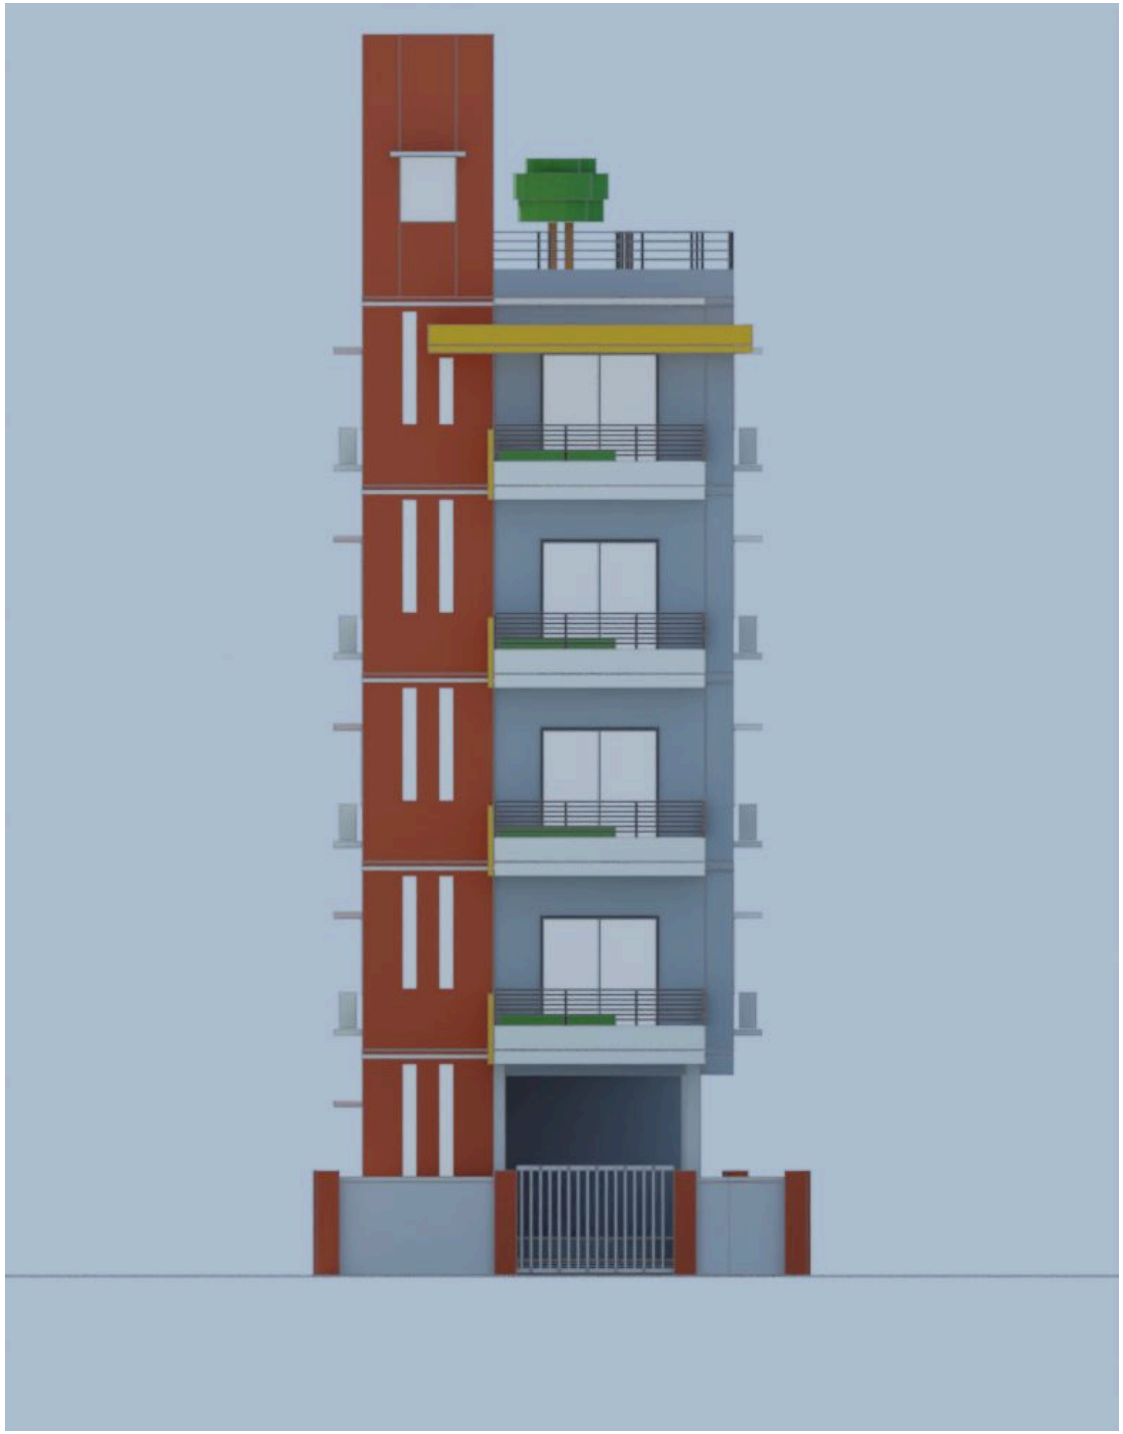

Phase 4 · look A (TH-20 Rajbari Blade) · option A road left



Phase 4 · look A (TH-20 Rajbari Blade) · option A road right



Phase 4 · look B (TH-H01 Brick Pylon with White Shelves) · option B aerial




Phase 4 · look B (TH-H01 Brick Pylon with White Shelves) · option B back left



Phase 4 · look B (TH-H01 Brick Pylon with White Shelves) · option B back right



Phase 4 · look B (TH-H01 Brick Pylon with White Shelves) · option B front

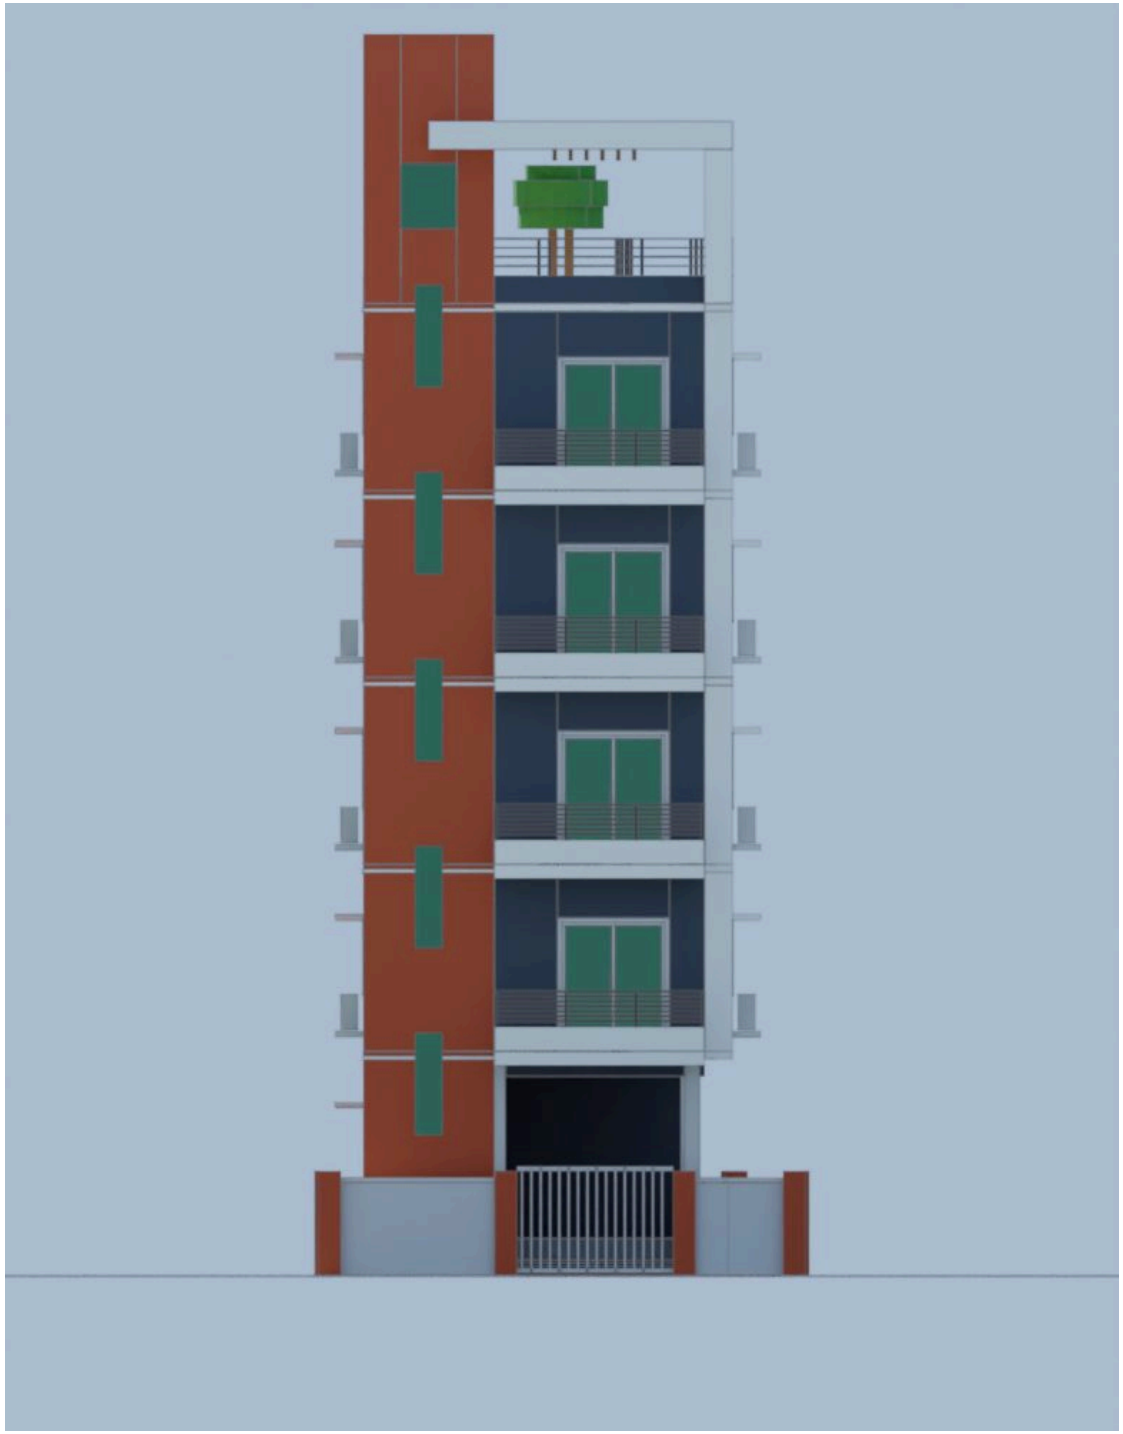


Phase 4 · look B (TH-H01 Brick Pylon with White Shelves) · option B road left




Phase 4 · look B (TH-H01 Brick Pylon with White Shelves) · option B road right



Phase 4 · look B (TH-H01 Brick Pylon with White Shelves) · option B side E

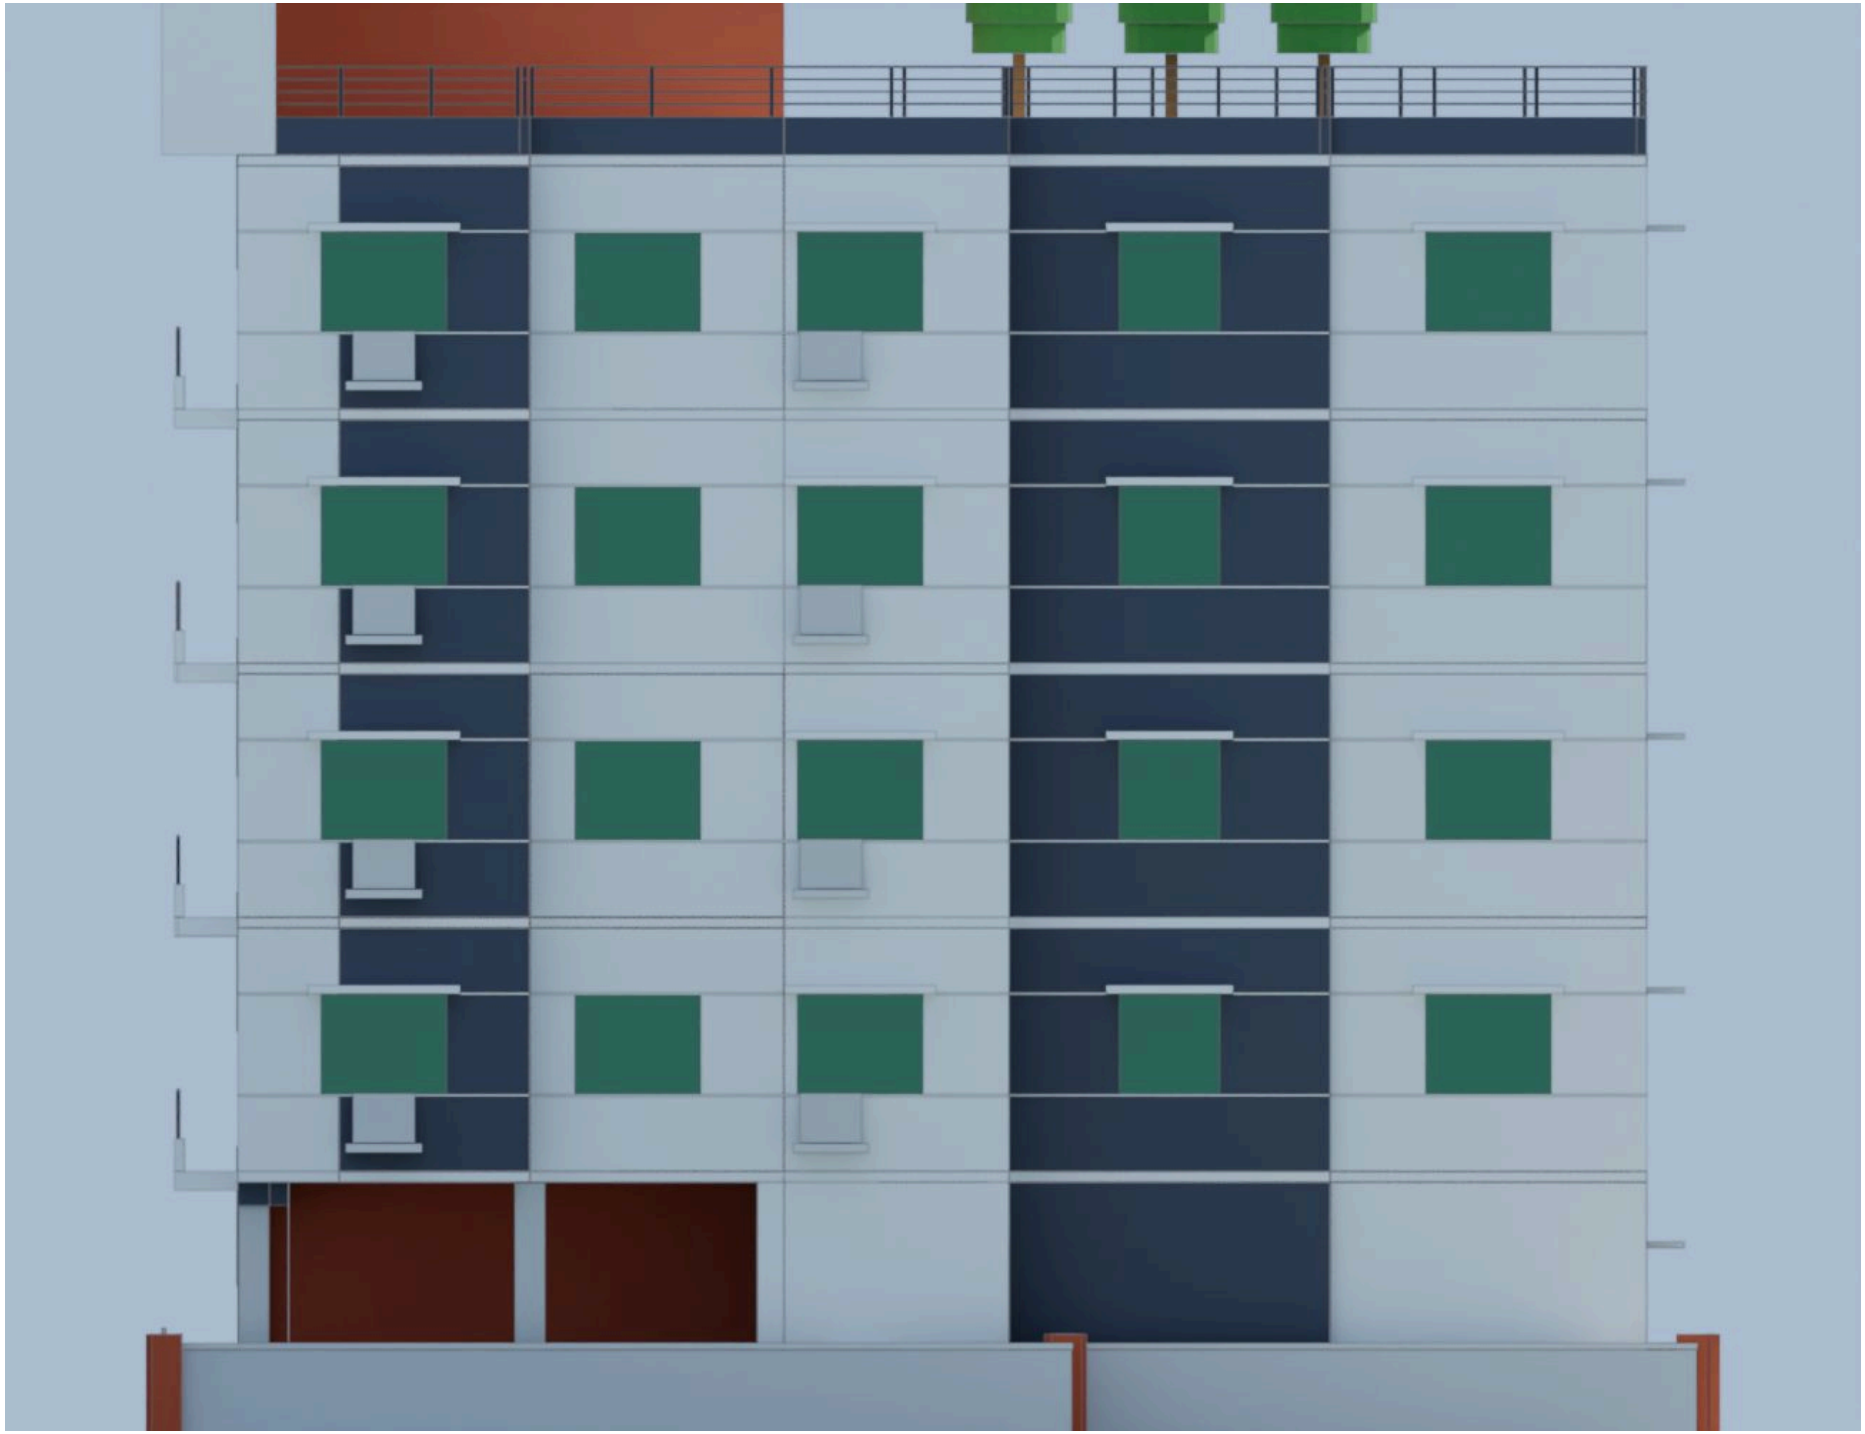

Phase 4 · look B (TH-H01 Brick Pylon with White Shelves) · option B side W

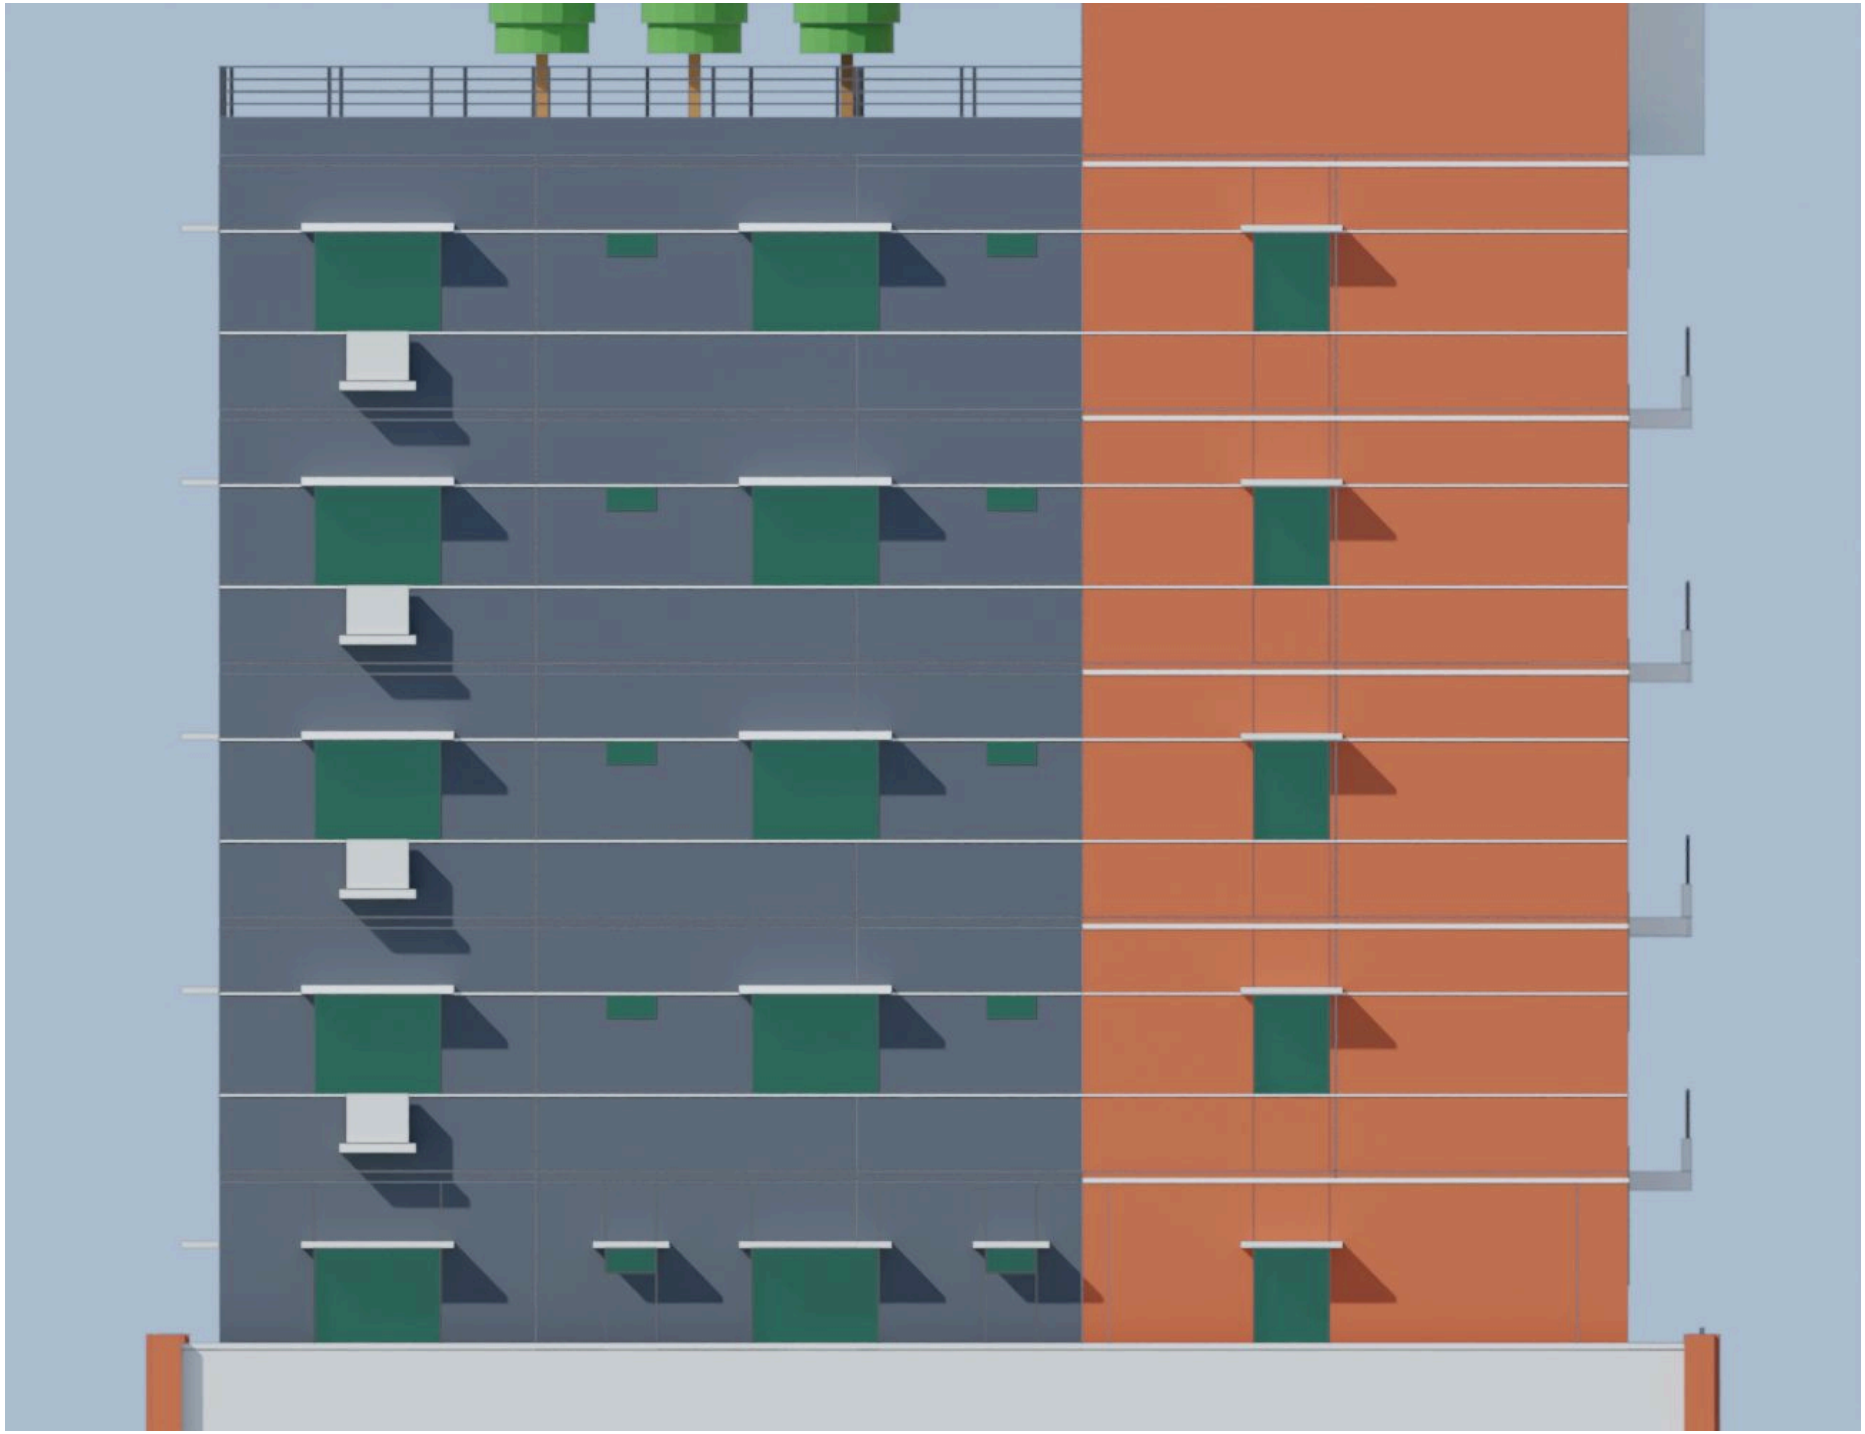

Phase 5A · look A · 1st to 4th Floor (Phase 5A)

P-016 P-16 Option A3, his frame (4 Nov) · 1st to 4th Floor · PHASE 5A · elevation-treated plan · option A



Common Bath: 49 → 46 sft gross (the treatment takes 4)

columns for 5 storeys: C1 10"×15" ×3 (corner) · C2 10"×15" ×9 (edge) · C3 10"×15" ×1 (inside) · C4 10"×15" ×4 (lift) — planning sizes from his grids; the engineer's design decides

STRUCTURAL ENGINEER: PHASE 5A · the elevation-treated plan — Phase 4's treatment mapped back onto the plan: walls moved where the composition carves, loggias as balconies with their trays over the setback, the brick blade hatched (////), the piers, the brick jali (solid brick), the wet slot's louvres, recessed window panels (dashed outline), the yellow plate and the trays above (dashed), F.S. = false slab at +7'-0" over the baths and kitchen (his legend, AR-13 to AR-16) · the typical floor's columns, beams and ducts carried through this floor unchanged · ✔ no finding

inside sizes (wall face to wall face) · walls: outside 5" (rule 82 bent to his narrow plans, rule 108), between units / core and partitions 5" · unit sft = gross (walls in), carpet = rooms inside · doors drawn with their swing, sliding doors to balconies · W = window, V = ventilator · ▼ = unit door · blue = duct shafts · red squares = columns, blue dotted bands = beams (red where a beam crosses a room) · F = fridge, WASH = hand-wash basin · red outline = a broken rule · dotted red = sunshade (inside the site line) · pink wave = curtain (open / closed) · dashed brown = site line, green = setback · duct sizes written inside each duct · lift drawn as its walled shaft with the car inside · AC (rule 177): a split AC in every bedroom and living — indoor unit dashed, high on the outside wall; its outdoor unit (ODU) on a cantilevered RCC tray 3'-0" × 1'-6" (4" slab, 6" upstand), hatched; side walls before the road front

Phase 5A · look A · Ground Floor (Phase 5A)

P-016 P-16 Option A3, his frame (4 Nov) · Ground Floor · PHASE 5A · elevation-treated plan · option A



columns for 5 storeys: C1 10"×15" ×3 (corner) · C2 10"×15" ×9 (edge) · C3 10"×15" ×1 (inside) · C4 10"×15" ×4 (lift) — planning sizes from his grids; the engineer's design decides
STRUCTURAL ENGINEER: PHASE 5A · the elevation-treated plan — Phase 4's treatment mapped back onto the plan: walls moved where the composition carves, loggias as balconies with their trays over the setback, the brick blade hatched (////), the piers, the brick jali (solid brick), the wet slot's louvres, recessed window panels (dashed outline), the yellow plate and the trays above (dashed), F.S. = false slab at +7'-0" over the baths and kitchen (his legend, AR-13 to AR-16) · the typical floor's columns, beams and ducts carried through this floor unchanged · ✔ no finding
inside sizes (wall face to wall face) · walls: outside 5" (rule 82 bent to his narrow plans, rule 108), between units / core and partitions 5" · unit sft = gross (walls in), carpet = rooms inside · doors drawn with their swing, sliding doors to balconies · W = window, V = ventilator · ▼ = unit door · blue = duct shafts · red squares = columns, blue dotted bands = beams (red where a beam crosses a room) · F = fridge, WASH = hand-wash basin · red outline = a broken rule · dotted red = sunshade (inside the site line) · pink wave = curtain (open / closed) · dashed brown = site line, green = setback · duct sizes written inside each duct · lift drawn as its walled shaft with the car inside · AC (rule 177): a split AC in every bedroom and living — indoor unit dashed, high on the outside wall; its outdoor unit (ODU) on a cantilevered RCC tray 3'-0" × 1'-6" (4" slab, 6" upstand), hatched; side walls before the road front

Phase 5A · look B · 1st to 4th Floor (Phase 5A)

P-016 P-16 Option A3, his frame (4 Nov) · 1st to 4th Floor · PHASE 5A · elevation-treated plan · option B



columns for 5 storeys: C1 10"×15" ×3 (corner) · C2 10"×15" ×9 (edge) · C3 10"×15" ×1 (inside) · C4 10"×15" ×4 (lift) — planning sizes from his grids; the engineer's design decides
STRUCTURAL ENGINEER: PHASE 5A · the elevation-treated plan — Phase 4's treatment mapped back onto the plan: walls moved where the composition carves, loggias as balconies with their trays over the setback, the brick blade hatched (////), the piers, the brick jali (solid brick), the wet slot's louvres, recessed window panels (dashed outline), the yellow plate and the trays above (dashed), F.S. = false slab at +7'-0" over the baths and kitchen (his legend, AR-13 to AR-16) · the typical floor's columns, beams and ducts carried through this floor unchanged · ✔ no finding
inside sizes (wall face to wall face) · walls: outside 5" (rule 82 bent to his narrow plans, rule 108), between units / core and partitions 5" · unit sft = gross (walls in), carpet = rooms inside · doors drawn with their swing, sliding doors to balconies · W = window, V = ventilator · ▼ = unit door · blue = duct shafts · red squares = columns, blue dotted bands = beams (red where a beam crosses a room) · F = fridge, WASH = hand-wash basin · red outline = a broken rule · dotted red = sunshade (inside the site line) · pink wave = curtain (open / closed) · dashed brown = site line, green = setback · duct sizes written inside each duct · lift drawn as its walled shaft with the car inside · AC (rule 177): a split AC in every bedroom and living — indoor unit dashed, high on the outside wall; its outdoor unit (ODU) on a cantilevered RCC tray 3'-0" × 1'-6" (4" slab, 6" upstand), hatched; side walls before the road front

Phase 5A · look B · Ground Floor (Phase 5A)

P-016 P-16 Option A3, his frame (4 Nov) · Ground Floor · PHASE 5A · elevation-treated plan · option B



columns for 5 storeys: C1 10"×15" ×3 (corner) · C2 10"×15" ×9 (edge) · C3 10"×15" ×1 (inside) · C4 10"×15" ×4 (lift) — planning sizes from his grids; the engineer's design decides
STRUCTURAL ENGINEER: PHASE 5A · the elevation-treated plan — Phase 4's treatment mapped back onto the plan: walls moved where the composition carves, loggias as balconies with their trays over the setback, the brick blade hatched (////), the piers, the brick jali (solid brick), the wet slot's louvres, recessed window panels (dashed outline), the yellow plate and the trays above (dashed), F.S. = false slab at +7'-0" over the baths and kitchen (his legend, AR-13 to AR-16) · the typical floor's columns, beams and ducts carried through this floor unchanged · ✔ no finding
inside sizes (wall face to wall face) · walls: outside 5" (rule 82 bent to his narrow plans, rule 108), between units / core and partitions 5" · unit sft = gross (walls in), carpet = rooms inside · doors drawn with their swing, sliding doors to balconies · W = window, V = ventilator · ▼ = unit door · blue = duct shafts · red squares = columns, blue dotted bands = beams (red where a beam crosses a room) · F = fridge, WASH = hand-wash basin · red outline = a broken rule · dotted red = sunshade (inside the site line) · pink wave = curtain (open / closed) · dashed brown = site line, green = setback · duct sizes written inside each duct · lift drawn as its walled shaft with the car inside · AC (rule 177): a split AC in every bedroom and living — indoor unit dashed, high on the outside wall; its outdoor unit (ODU) on a cantilevered RCC tray 3'-0" × 1'-6" (4" slab, 6" upstand), hatched; side walls before the road front